

MW1-LTX-Fx Wireless Belt-pack Transmitters

www.boschsecurity.com



BOSCH
Invented for life



- ▶ 193 selectable UHF channels
- ▶ PLL synthesized technology
- ▶ LCD with battery status and frequency indication
- ▶ Lock function
- ▶ Approximately 15 hours operation on alkaline batteries

The MW1-LTX-F1 and MW1-LTX-F2 wireless belt-pack transmitters are part of the Bosch wireless microphone system. The complete system consists of a microphone receiver (MW1-RX-F1 or MW1-RX-F2), a wireless belt-pack transmitter with clip-on lavalier microphone (MW1-LTX-F1 or MW1-LTX-F2), a wireless handheld microphone (MW1-HTX-F1 or MW1-HTX-F2). The products are sold separately to offer optimal flexibility in the composition of the system.

The wireless microphone system is designed for public address in houses of worship, restaurants, conference centers, hotels, shops and many other applications.

The lavalier microphone (MW1-LMC) can be ordered separately without the belt-pack transmitter. An optional head-worn microphone (MW1-HMC) can also be ordered separately.

Functions

Frequencies

This microphone system operates in the UHF band providing interference reduction, while 193 available frequencies ensure stable reception. The MW1-LTX-F1 operates in the 790 to 814 MHz frequency band, and the MW1-LTX-F2 operates in the 852 to 876 MHz band. The country overview lists the recommended type number for each country.

Operation

The belt-pack transmitter can operate approximately 15 hours on alkaline batteries. A lock function protects the transmitter settings, making accidental changes impossible. This feature is also available on the Bosch microphone receiver and the belt-pack transmitter. An LCD on the transmitter shows the selected frequency and the battery status.

The belt-pack transmitter comes with a case to protect it from damage, and a lavalier clip-on microphone (MW1-LMC).

Controls and indicators

- Frequency up/down buttons
- LCD displaying frequency and battery level

Certifications and approvals

CE Marking	acc. to R & TTE directive 1999/5/EC
EMC	acc. to ETSI EN 301489-1 acc. to ETSI EN 301489-9 acc. to ETSI EN 300422-2

Region	Certification
Europe	CE

Installation/configuration notes

Country Overview

Austria	MW1-RX-F1/MW1-RX-F2
Belgium	MW1-RX-F1/MW1-RX-F2
Czech republic	MW1-RX-F1
Denmark	MW1-RX-F1
Estonia	MW1-RX-F1/MW1-RX-F2
Finland	MW1-RX-F2
France	MW1-RX-F1
Germany	MW1-RX-F1/MW1-RX-F2
Hungary	MW1-RX-F1/MW1-RX-F2
Ireland	MW1-RX-F2
Italy	MW1-RX-F1/MW1-RX-F2
Liechtenstein	MW1-RX-F1/MW1-RX-F2
Lithuania	MW1-RX-F1
Luxembourg	MW1-RX-F1/MW1-RX-F2
Netherlands	MW1-RX-F2
Norway	MW1-RX-F1/MW1-RX-F2
Poland	MW1-RX-F1/MW1-RX-F2
Portugal	MW1-RX-F1
Slovakia	MW1-RX-F2
Spain	MW1-RX-F2
Switzerland	MW1-RX-F1
Sweden	MW1-RX-F2
United Kingdom	MW1-RX-F2
Australia	MW1-RX-F1
China	MW1-RX-F1
Indonesia	MW1-RX-F1/MW1-RX-F2
Japan	MW1-RX-F1

Korea	MW1-RX-F1
Philippines	MW1-RX-F1/MW1-RX-F2
Taiwan	MW1-RX-F1
Thailand	MW1-RX-F1/MW1-RX-F2
Vietnam	MW1-RX-F1/MW1-RX-F2
MW1-RX-F1	790 to 814 MHz
MW1-RX-F2	852 to 876 MHz




Protective case with wireless, belt-pack and accessories




Belt-pack rear view



Lavalier microphone with clip

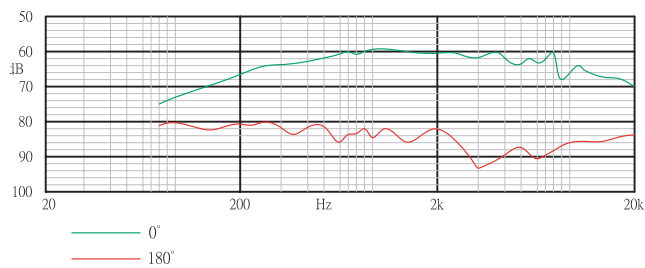

Frequency response

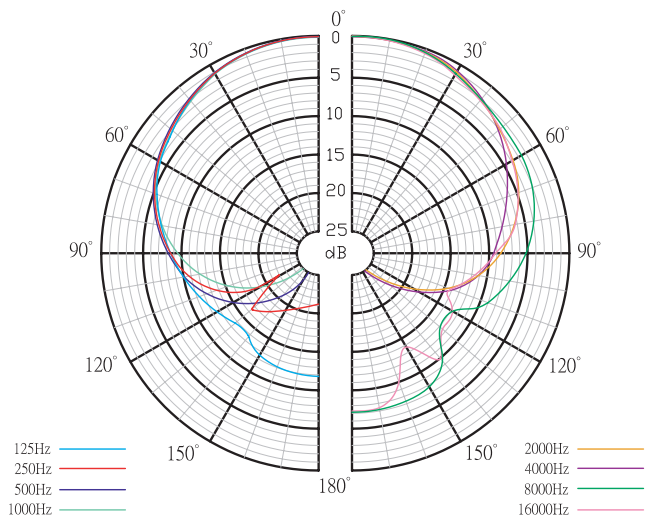

Polar diagram

Parts included

Quantity	Components
1	MW1-LTX-F1 Wireless Belt-pack Transmitter or MW1-LTX-F2 Wireless Belt-pack Transmitter
1	Protective case
2	LR5/AA batteries
1	MW1-LMC Lavalier Microphone

1	Windscreen
1	Clip

Technical specifications

Electrical

Belt-pack	
Batteries	2 x LR6/AA/UM3 1.5 V
Battery life time	Approx. 15 hr
Modulation	FM frequency modulation
Frequency selection	PLL synthesized control
Frequency range	MW1-LTX-F1: 790 to 814 MHz MW1-LTX-F2: 852 to 876 MHz
Channels	193 channels in steps of 125 kHz
Frequency stability	±0.005%
Frequency deviation	±48 kHz
S/N ratio	>102 dB
RF output	10 mW
Spurious rejection	>60 dBc
Dynamic range	>110 dB
Response	50 Hz to 15 kHz
Squelch	Pilot tone & noise mute

Lavalier microphone

Connector	Mini XLR (tiny QG)
Frequency range	100 Hz to 12 kHz
Polar pattern	Cardioid
Sensitivity (at 1 kHz)	-70 dB ± 3 dB
Impedance	2.2 kohm ±30%
Max SPL for 1% THD	130 dB(SPL)

Mechanical

Belt-pack	
Dimensions (H x W x D)	105 x 78 x 34 mm without antenna
Color	Charcoal
Weight	176 g
Antenna	Flexible

Lavalier microphone

Dimensions (L x D)	30 x 16 mm
Color	Charcoal

Weight	20 g
Cable length	1 m

Environmental

Operating temperature	-25 °C to +55 °C
Storage temperature	-40 °C to +70 °C
Relative humidity	<95%

Ordering information

MW1-LTX-F1 UHF Wireless Belt-pack Transmitter

frequency range 790 to 814 MHz

Order number **MW1-LTX-F1**

MW1-RX-F1 UHF Wireless Microphone Receiver

frequency range 790 to 814 MHz

Order number **MW1-RX-F1**

MW1-LTX-F2 UHF Wireless Belt-pack Transmitter

frequency range 852 to 876 MHz

Order number **MW1-LTX-F2**

MW1-RX-F2 UHF Wireless Microphone Receiver

frequency range 852 to 876 MHz

Order number **MW1-RX-F2**

Accessories

MW1-HMC Head-worn Microphone

miniature condenser microphone with omni-directional pick-up pattern

Order number **MW1-HMC**

MW1-LMC Lavelier Microphone

with clip and windscreen, for use with MW1-LTX-Fx

Order number **MW1-LMC**

Represented by:

Americas:

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
al.securitysystems@bosch.com
www.boschsecurity.com